

# Crane/Hanging Scales

**NEW**

## Intercomp CS™ 3000-RFX

Crane Scale



### APPROVALS



### STANDARD FEATURES

#### Scale:

- Auto shut-off, configurable from 0 to 255 minutes
- NEMA 4 cast aluminum case
- 1 inch LCD digital readout with auto backlight
- Powered by eight D cell batteries

#### RFX Wireless Hand Held Indicator:

- Rugged ABS Industrial Housing
- Four line, 5-digit, 0.5 inch LCD digital readout
- Indicator carrying case with charger and 4 AA NiMH rechargeable batteries
- 40 hours of continuous use (with backlight off)
- Ability to turn the hanging unit on or off

### SPECIFICATIONS

#### RESOLUTION:

20 bit A/D delivers more than 1 million internal counts

#### CONTROLS:

Zero, lb/kg, Tare, Mode, Accum Total, On/Off

#### DISPLAY:

1 in (25 mm) 5-digit liquid crystal (LCD)

#### STATUS ANNUNCIATORS:

lb/kg, Net, Gross, Total, Tare, Low Battery

#### POWER:

(Batteries are not included) eight D size disposable alkaline dry cell or rechargeable nickel-cadmium cell.

#### BATTERY LIFE:

8 D cell alkalines (not included) 2000 hours  
8 NiCad rechargeable batteries  
(sold as an option) 900 hours

#### TARE:

Up to 100% of capacity

#### ENCLOSURE:

NEMA 4 cast aluminum case

#### HOOK OR EYE:

Crosby-Laughlin or equivalent

#### ACCURACY:

±0.1% of reading

#### TEMPERATURE:

Operating -4°F to 140°F  
(-20°C to 60°C)

#### NOMINAL OVERLOAD:

200% of capacity

#### MAXIMUM OVERLOAD:


500% of capacity

#### APPROVALS:

NTEP Certified per H-44, Class III, 3000d;  
Class III L, 5000d, COC# 97-135A4  
CE

#### WARRANTY:

One-year limited warranty

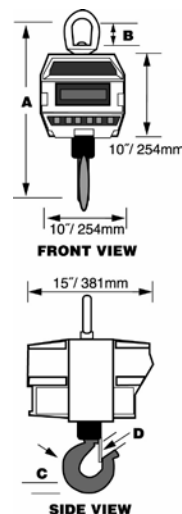

### DIMENSIONS

Part#	Capacity	Graduation	A	B	C	D	*	Hook	Eye Nut or Shackle
118816	2000lb (1000kg)	1.0lb (0.5kg)	19.3in (490mm)	3.06in (77.7mm)	1.44in (35.1mm)	1.41in (35.8mm)	*	C/L 3 ton S1 Swivel	C/L #7 Eye Nut
118817	5000lb (2500kg)	1.0lb (0.5kg)	22in (558mm)	3.06in (77.7mm)	1.82in   (44.5mm)	1.69in (42.9mm)	*	C/L 5 ton S1 Swivel	C/L #7 Eye Nut
118818	10000lb (5000kg)	2lb (1kg)	22in (558mm)	3.06in (77.7mm)	1.82in (44.5mm)	1.69in (42.9mm)	*	C/L 5 ton S1 Swivel	C/L #7 Eye Nut
118819	20000lb (10000kg)	5lb (2kg)	37.15in (944mm)	6.25in (159mm)	2.6in (65.8mm)	2.41in (61.2mm)	*	C/L 10 ton S1 Swivel	C/L #11 Eye Nut
118820	30000lb (15000kg)	10lb (5kg)	39.15in (994mm)	6.25in (159mm)	3in (76.2mm)	3.19in (81.3mm)	*	C/L 15 ton S1 Swivel	C/L #11 Eye Nut
118821	†50000lb (†25000kg)	10lb (5kg)	43.5in (1105mm)	6in (152mm)	3.6in (93mm)	3.62in (92mm)	17in (432mm)	C/L 25 ton S1 Swivel	C/L 30 ton #2140
118822	†70000lb (†35000kg)	20lb (10kg)	47.56in (1208mm)	6in (152mm)	4.56in (116mm)	3.75in (92.3mm)	17in (432mm)	C/L 35 ton S1 Swivel	C/L 40 ton #2140
118823	†100000lb (†50000kg)	20lb (10kg)	53in (1347mm)	7.75in (197mm)	5.06in (129mm)	4.25in (108mm)	18in (457mm)	C/L 45 ton S1 Swivel	C/L 50 ton #2140

\* Dimensions are top to bottom shackle eye to eye on 25-50 ton/12.5-25 metric ton capacity models

† Unit comes standard with top shackle & bottom swivel hook.

## Intercomp CS™ 3000-RFX

PART #	DESCRIPTION	EST. SHIP WEIGHT	PRICE
<b>CS3000 (batteries not included):</b>			
118816*	CS3000-RFX, 2,000lb (1,000kg) x 1.0lb (0.5kg)	52lb	Consult
118817*	CS3000-RFX, 5,000lb (2,500kg) x 1.0lb (0.5kg)	60lb	Consult
118818*	CS3000-RFX, 10,000lb (5,000kg) x 2lb (1kg)	60lb	Consult
118819*	CS3000-RFX, 20,000lb (10,000kg) x 5lb (2kg)	100lb	Consult
118820*	CS3000-RFX, 30,000lb (15,000kg) x 10lb (5kg)	125lb	Consult
118821*	CS3000-RFX, 50,000lb (25,000kg) x 10lb (5kg)	225lb	Consult
118822*	CS3000-RFX, 70,000lb (35,000kg) x 20lb (10kg)	253lb	Consult
118823	CS3000-RFX, 100,000lb (50,000kg) x 20lb (10kg)	397lb	Consult

### OPTIONS/ACCESSORIES

43940	120/220V external charger (batteries not included) for qty 2x4 D-Nicad/NiMH		Consult
97445	Battery pack, qty 2x4 D-size-Nicad		Consult

\* NTEP Certified